


1990



1 2

A & D: 1/16" NEOPRENE/NYLON STRETCH LAYER WITH
FOUR-WAY MOBILITY; SEALS CONFOR

B: 1/8" NEOPRENE/RUBBER
NON-STRETCH LAYER;
REDUCES TRAUMA BY
DAMPENING

EXTERIOR

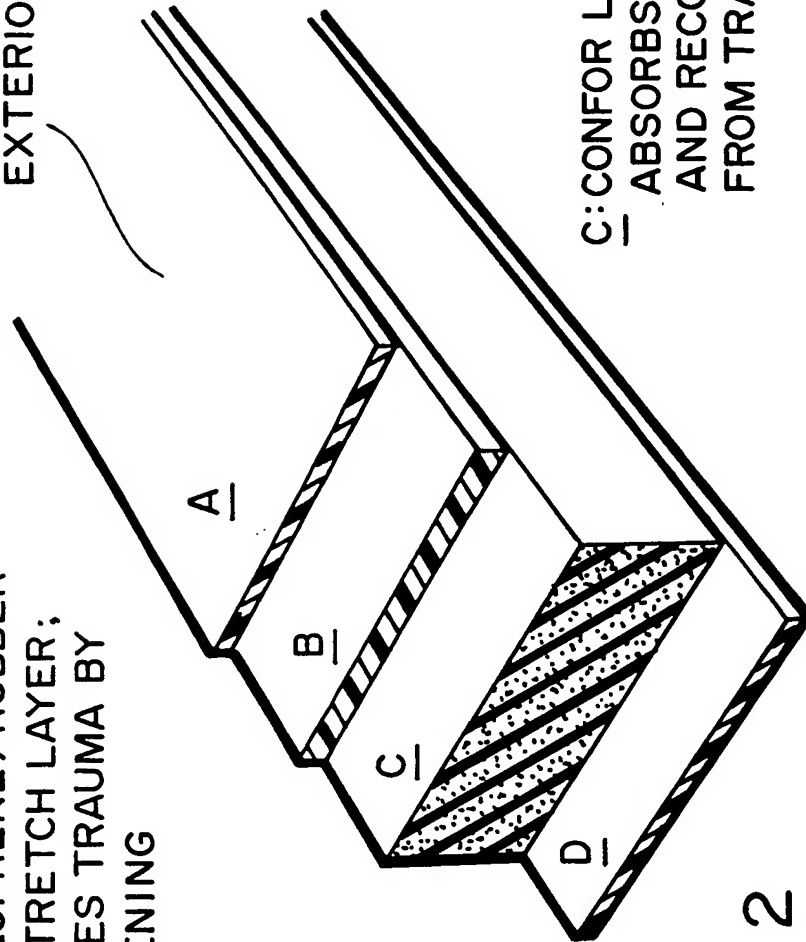


FIG. 2

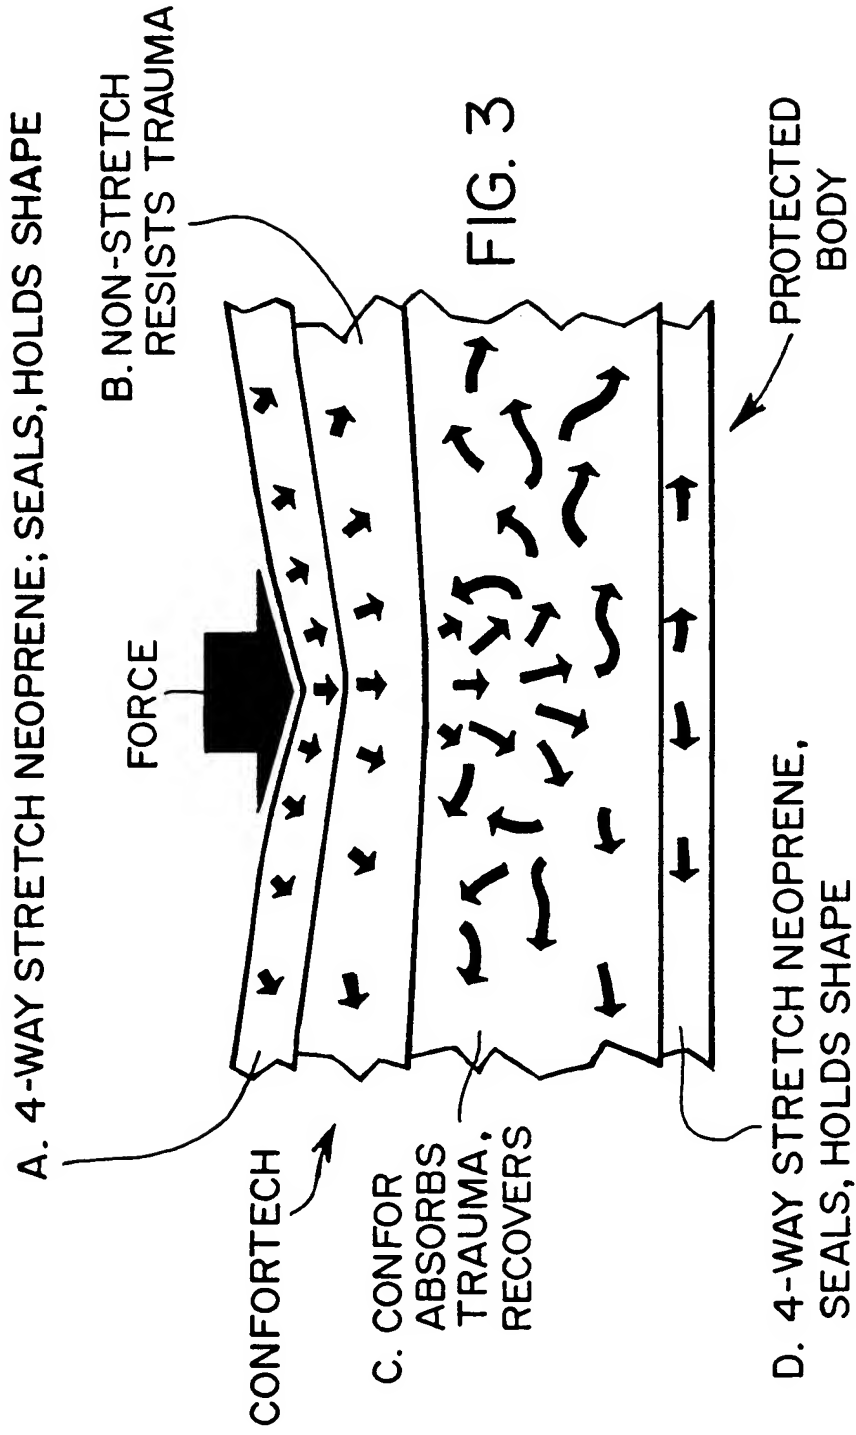




FIG. 4a

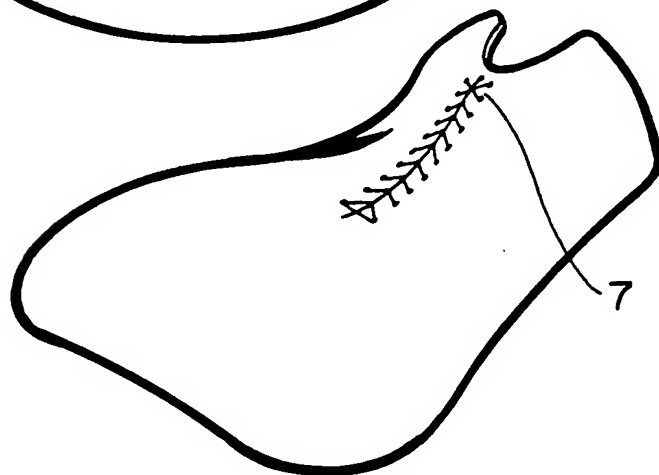
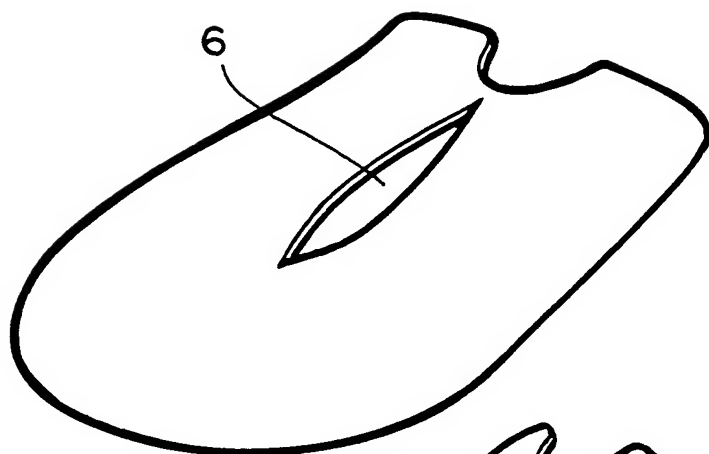
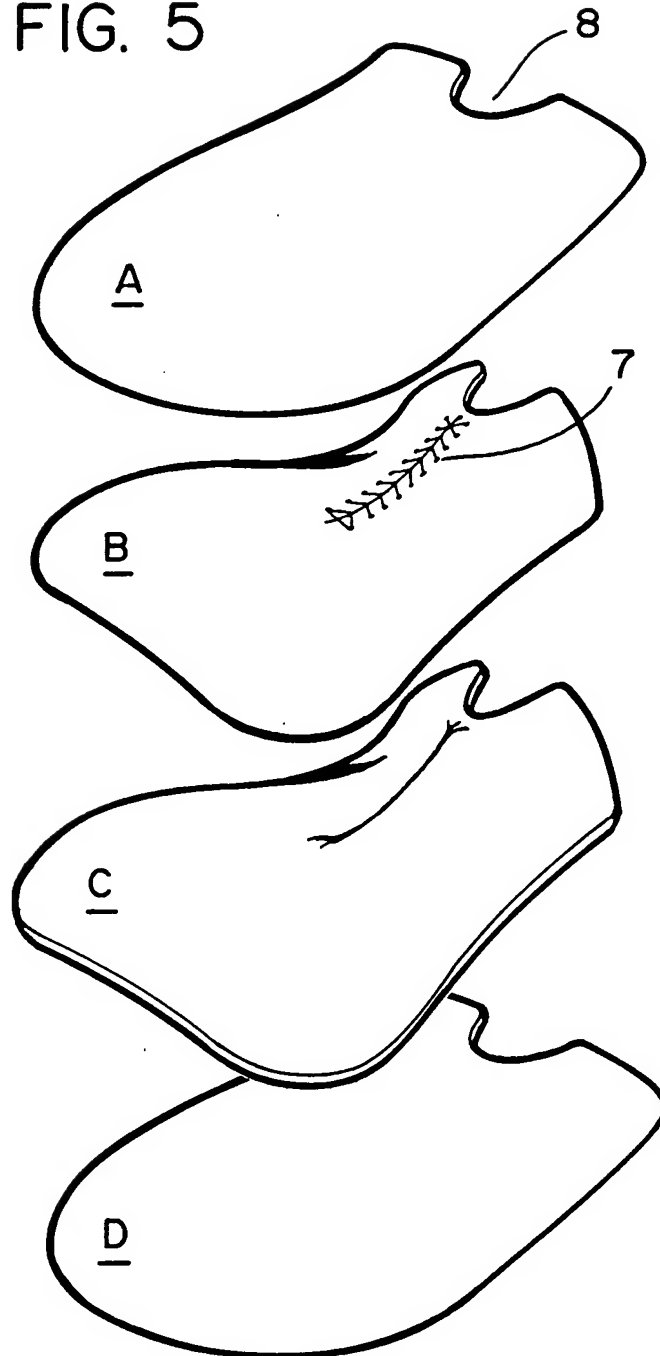


FIG. 4b

U.S. PATENT OFFICE

FIG. 5



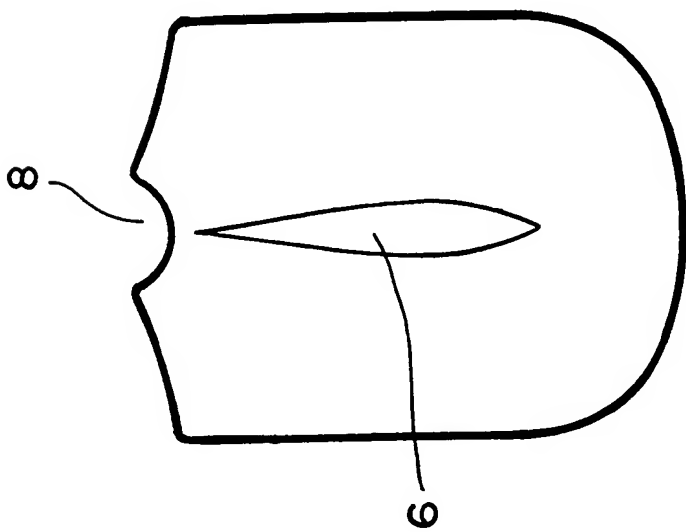


FIG. 6a

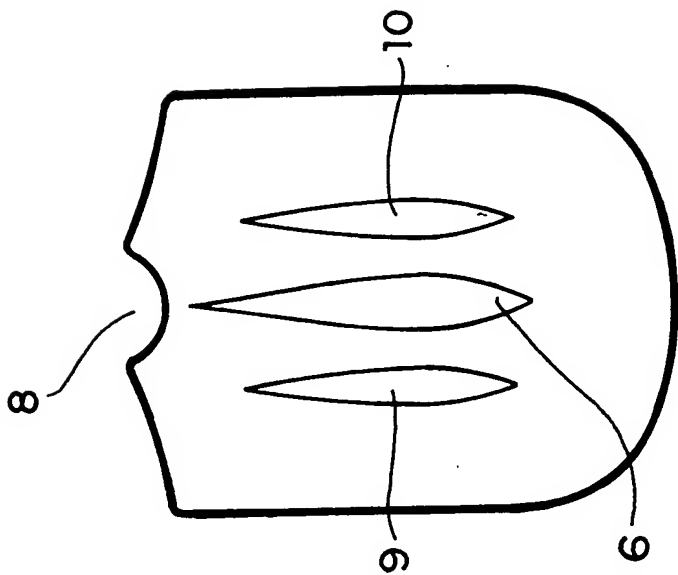


FIG. 6b

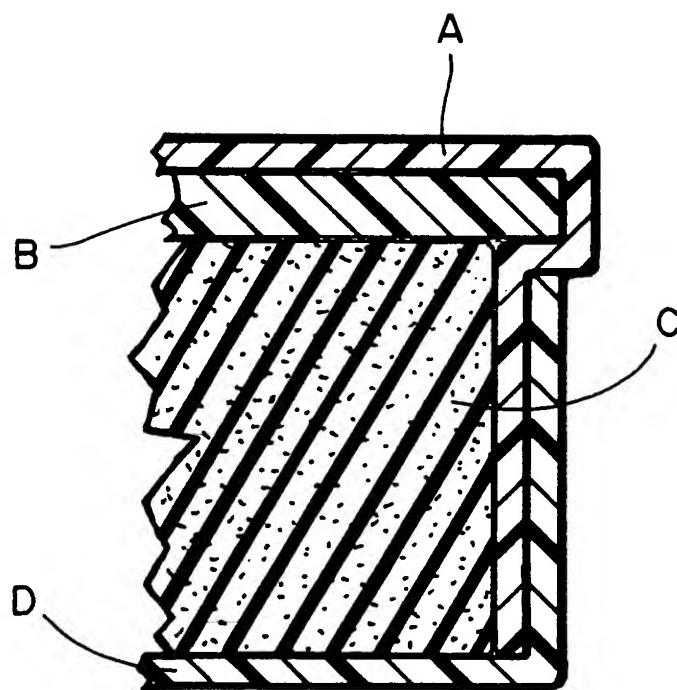


FIG. 7

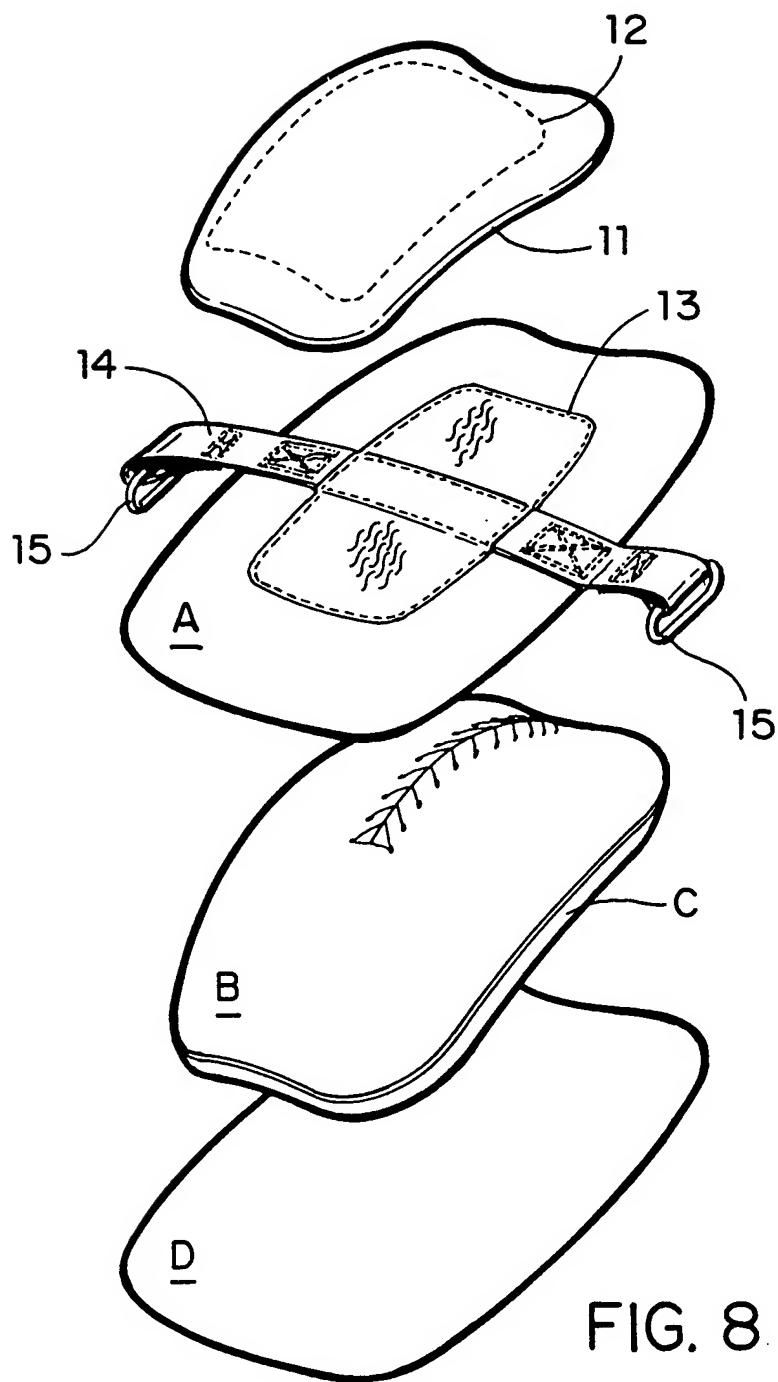


FIG. 8